


# Manual Cassette Tray KL-FSE

**Model/ID: 7501-0-0003**

**Instruction for Use**

Ident. Nr. 5051-0-0022

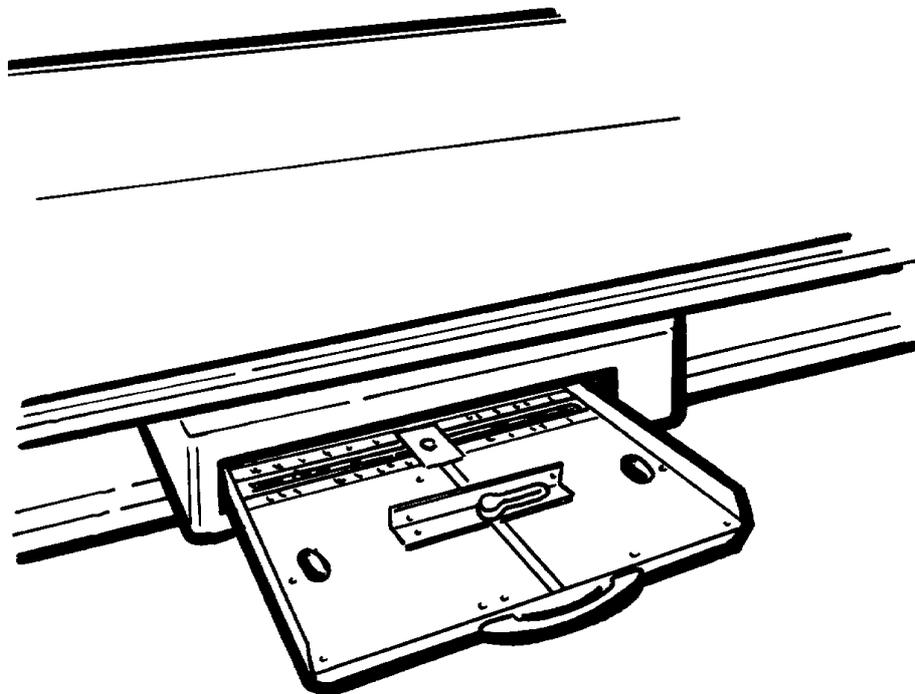

**CE**

ALL SHEETS OF THIS DOCUMENT CONTAIN PROPRIETARY AND CONFIDENTIAL INFORMATION OF **PROTEC GMBH & CO. KG** AND IS INTENDED FOR EXCLUSIVE USE BY CURRENT **PROTEC GMBH & CO. KG** PERSONNEL. COPYING, DISCLOSURE TO OTHERS OR OTHER USE IS PROHIBITED WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF **PROTEC GMBH & CO. KG** 'S LAW DEPARTMENT. REPORT ANY VIOLATIONS OF THIS REQUIREMENT TO **PROTEC GMBH & CO. KG** .

© 2011 PROTEC GmbH & Co. KG, Oberstenfeld

This document is prepared and distributed by Publications Department.  
Send inquiries regarding this document to the following address:

PROTEC GmbH & Co. KG  
In den Dorfwiesen 14 | 71720 Oberstenfeld

Telefon: +49 (0) 7062 – 92 55 0

Fax: +49 (0) 7062 – 22 68 5

e-Mail: [protec@protec-med.com](mailto:protec@protec-med.com)

Internet: [www.protec-med.com](http://www.protec-med.com)

<b>Content</b>	<b>Page</b>
<b>NOTE b</b>	
<b>Document Effectivity</b> .....	<b>b</b>
<b>Mechanical - Electrical Warning</b> .....	<b>c</b>
<b>Radiation Warning</b> .....	<b>c</b>
<b>To the User</b> .....	<b>c</b>
<b>Improvement Recommendations</b> .....	<b>c</b>
<b>1 Equipment Description</b> .....	<b>1</b>
1.1 Introduction.....	1
1.2 Intended Purpose .....	1
1.3 Declaration of Conformity .....	1
1.4 Description.....	1
1.5 Optional Equipment .....	1
1.6 Nameplate .....	1
<b>2 Control Elements and Indicators</b> .....	<b>2</b>
2.1 Cassette tray .....	2
2.2 Cassette clamps .....	2
2.3 Handle .....	2
2.4 Cassette positioner .....	2
2.5 Cassette sensing unit (fail-safe).....	3
<b>3 Operating Instructions</b> .....	<b>4</b>
3.1 Safety Aspects.....	4
3.1.1 Requirements for Operation .....	4
3.1.2 Users .....	4
3.1.3 Emergency Off switch .....	4
3.1.4 Explosion protection.....	4
3.1.5 Radiation Protection.....	4
3.1.6 Interferences to other devices .....	5
3.1.7 Warnings.....	5
3.2 Inserting a film cassette into the cassette tray.....	5
<b>4 Operator Maintenance</b> .....	<b>6</b>
4.1 Introduction.....	6
4.2 Operating.....	6
4.3 Safety Information.....	6
4.4 Technical Safety Information.....	6
4.5 Preventative maintenance .....	7
4.6 User's maintenance.....	7
4.6.1 Daily maintenance prior to operation .....	7
4.6.2 Daily maintenance during operation .....	7
4.6.3 Monthly maintenance .....	7
4.6.4 Service maintenance.....	7
4.7 User's maintenance schedule .....	7
4.7.1 Daily maintenance.....	7
4.7.2 Cleaning.....	7
4.7.3 Disinfection .....	8
4.7.4 Quality Control .....	8
4.7.5 Service Maintenance Schedule.....	8
4.7.6 Disposal Remarks.....	8
<b>5 Combination with other equipment</b> .....	<b>9</b>
<b>6 Technical Data</b> .....	<b>10</b>
6.1 Measurements.....	10
6.2 Mechanical Characteristics .....	10

6.3	Electrical Characteristics.....	10
6.4	Environmental Conditions .....	10
6.4.1	Operating Environment .....	10
6.4.2	Transport and stock environment .....	10
6.5	Standards .....	10
<b>7</b>	<b>Description of Symbols, Labels and Abbreviations.....</b>	<b>11</b>
7.1	Symbols.....	11
7.2	Labels.....	11
7.3	Abbreviations .....	11

## NOTE

The information contained in this document conforms with the configuration of the equipment as of the date of manufacture. Revisions to the equipment subsequent to the date of manufacture will be addressed in service updates distributed to the PROTEC Technical Service Organization.

### Document Effectivity

Revision No.	Date	List of effective pages	Comments
	18/01/2006	all	Original Issues
Rev 01	10/02/2006		New Picture
Rev 02	25/11/2010		Modified address
Rev 03	02/08/2011		Lable Protec
Rev 04	30/11/2011		New Lable
Rev 05	03/05/2012		New nameplate

## Mechanical - Electrical Warning

All of the **movable assemblies and parts of this equipment** should be operated with care and routinely inspected in accordance with the manufacturer's recommendations contained in the equipment Accompanying Documents. Maintenance and service is only to be performed by personnel authorized by **PROTEC GmbH & Co. KG**.

**Live electrical terminals are deadly.**

**Do not remove flexible high tension cables from X-ray tube housing or high tension generator and/or access covers from X-ray generator.**

For all components of the equipment protective earthing means must be provided in compliance with the national regulations.

**Failure to comply with the foregoing may result in serious or fatal bodily injuries to the operator or those in the area.**

## Radiation Warning

The component of the equipment described within this Document is part of a system for the intended generation of X-rays for medical diagnosis.

**X-rays generate a potential risk for both patients and operators.**

For this reason the application of X-rays for a given medical purpose must aim at the minimization of radiation exposition to any persons.

Those persons responsible for the application must have the specific knowledge according to legal requirements and regulations and must establish safe exposure procedures for these kind of systems. Those persons responsible for the planning and installation of this equipment must observe the national regulations.

## To the User

The user of this Document is directed to read and carefully review the instructions, warnings and cautions contained herein prior to beginning operation, installation or service activities. While you may have previously operated equipment similar to that described in this Document, changes in design, manufacture or procedure may have occurred which significantly affect the present operation.

The installation and service of equipment described herein is to be performed by authorized, qualified **PROTEC** personnel. Assemblers and other personnel not employed by nor directly affiliated with **PROTEC** technical services are directed to contact the local **PROTEC** office before attempting installation or service procedures.

## Improvement Recommendations

Users of this Document are encouraged to report errors, omissions and improvement recommendations to the following address:

PROTEC GmbH & Co. KG  
In den Dorfwiesen 14 | 71720 Oberstenfeld  
Telefon: +49 (0) 7062 – 92 55 0  
Fax: +49 (0) 7062 – 22 68 5  
e-Mail: [protec@protec-med.com](mailto:protec@protec-med.com)  
Internet: [www.protec-med.com](http://www.protec-med.com)



# 1 Equipment Description

## 1.1 Introduction

This „Instruction for Use“ describes the special, characteristic features and the correct operational instructions which are necessary for the efficient and effective use of the Manual Cassette Tray KL-FSE with cassette safety release (fail-safe).

It is suggested that you review the operation instructions, the safety notes and the controls described in this “Instruction for Use” before using the Manual Cassette Tray KL-FSE. Each control device and each display is described in order to make you acquaint with its function.

## 1.2 Intended Purpose

The Cassette Tray KL-FSE accepts any film cassette for film sizes from 13 cm x 18 cm (5" to 7") to 35,5 cm x 43 cm (14" x 17") when placed in either direction in the Cassette Tray.

The Cassette Tray has a film cassette locking mechanism which centers the film cassette from front to back and a film cassette side support to support the film cassette when the Cassette Tray is used in a vertical position.

## 1.3 Declaration of Conformity



This product is in conformity to the requirements of the European Community Medical Device Directive 93/42/EEC from 06/14/1993.

You can get the declaration of conformity directly from:

PROTEC GmbH & Co. KG  
In den Dorfwiesen 14 | 71720 Oberstenfeld  
Telefon: +49 (0) 7062 – 92 55 0  
Fax: +49 (0) 7062 – 22 68 5  
e-Mail: [protec@protec-med.com](mailto:protec@protec-med.com)  
Internet: [www.protec-med.com](http://www.protec-med.com)

## 1.4 Description

The Cassette Tray KL\_FSE consists of the following equipment components:

- Cassette tray,
- Cassette clamps,
- Cassette positioner.
- Cassette sensing unit (fail-safe)

## 1.5 Optional Equipment

The **Manual Cassette Tray KL-FSE** requires no optional equipment.

## 1.6 Nameplate

The name plate for the Cassette Tray KL is located at the front on the right side, readable from the bottom side.

## 2 Control Elements and Indicators

The controls of the Manual Cassette Tray KL are shown in Figure 2-1: Cassette Tray and their functions are briefly described on the following page.

<b>Warning</b>	
<b>Pinch points are present. Grip only the handle to pull out or to push in the cassette tray KL.</b>	
<b>Failure to comply may cause injury to operator's hands.</b>	

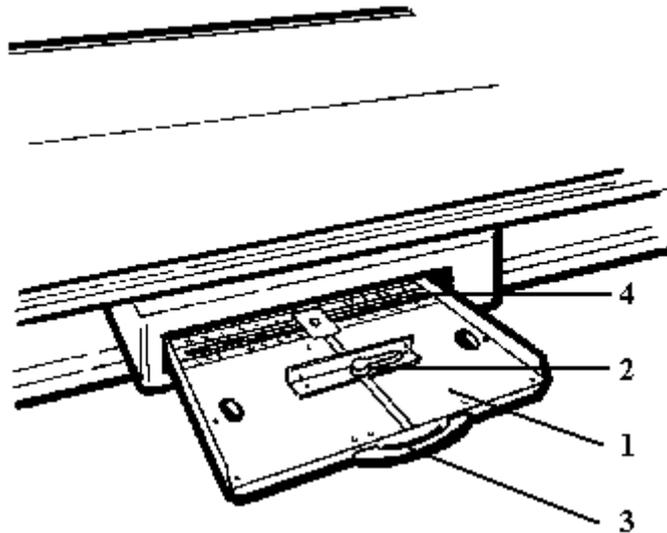


Figure 2-1: Cassette Tray

### 2.1 Cassette tray

The cassette tray (Figure 2-1, item 1) positions the film cassette in the Bucky.

### 2.2 Cassette clamps

Two cassette clamps (Figure 2-1, item 2) center the film cassette transversely within the cassette tray (Figure 2-1, item 1).

### 2.3 Handle

A film cassette may be inserted, when the cassette tray (Figure 2-1, item 1) is pulled out by its handle (Figure 2-1, item 3) from the Bucky to the forward stop.

### 2.4 Cassette positioner

The film cassette may be longitudinally centered within the cassette tray (Figure 2-1, item 1) with its transverse center line aligned with the notch in the cassette clamps (Figure 2-1, item 2) or by pushing the film cassette against the cassette positioner (Figure 2-1, item 4) positioned into the locking corresponding to the inserted film cassette.

## 2.5 Cassette sensing unit (fail-safe)

After positioning of a film cassette into the cassette tray (Figure 2-2, item 1) and locking of the cassette clamps (Figure 2-2, item 2), the cassette sensing unit (Figure 2-2, item 3) will be activated and generates the cassette safety release signal (fail-safe).

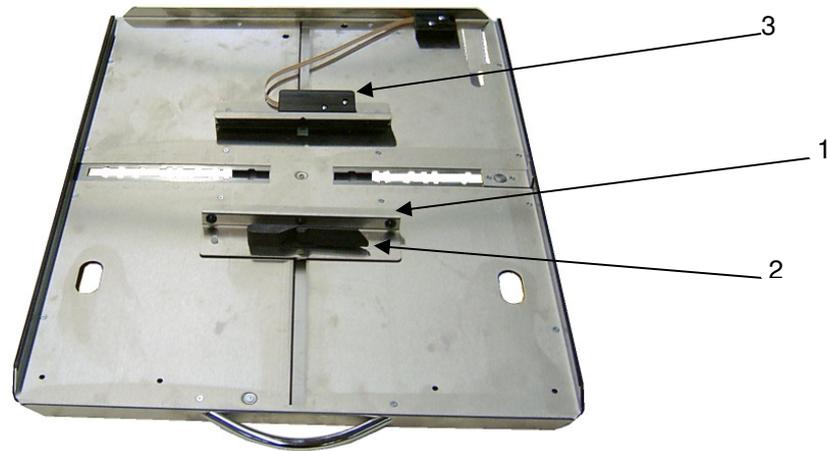


Abbildung 2-2

## 3 Operating Instructions

### 3.1 Safety Aspects

#### 3.1.1 Requirements for Operation

Prior to operating the system, the user must ascertain that all devices are in safe operation and proper working condition, and that the product is ready for use.

#### 3.1.2 Users

The system must be operated by qualified users, trained in the use of human diagnostic X-ray equipment in conformity with the respective national regulations. A product introduction for the user is necessary.

#### 3.1.3 Emergency Off switch

If an emergency OFF switch is provided by the owner, then the following shall be observed:

- Activate the emergency OFF switch immediately in case of hazard to the patient, the operator or the unit. This disconnects the power supply to the entire system and all movements are stopped.
- The emergency OFF switch may be reset only after the hazard has been positively identified and the problem is solved. Notify the **PROTEC** customer service department in all other cases (such as a malfunctioning of the unit).

#### 3.1.4 Explosion protection

This unit is not designed for operation in potentially explosive atmospheres.

#### 3.1.5 Radiation Protection

X-rays represent a hazard to both patients and operator if the rules for the use of such systems are not observed.

For this reason the principles of radiation protection must have the highest priority and they shall be observed at all times.

- **Keep distance from the radiation source**  
The dose declines with the square of the distance from a (point-like) radiation source, i.e. doubling the distance reduces the dose to one quarter, tripling the distance reduces the dose to one ninth, etc.
- **Keep exposure periods short**  
The dose rises linear to the exposure time, i.e. halving the exposure period will halve the dose (this is applicable particularly for fluoroscopy; when making X-ray films the current time product (mAs value) is prescribed in the most cases).
- **Use shielding and protective clothing**  
The protective factor rises exponentially with the thickness of the shielding. This means that two half-value layers will reduce (homogeneous) radiation to 1/4, three half-value layers to 1/8, and 10 half-value layers will reduce the radiation to less than 1/1000 of the original value.
- **Never reach into the direct X-ray beam**  
The dose in the direct, non-attenuated X-ray beam is some 100 times higher than the scattered radiation.
- **Personal dose meters**

During work with X-ray use corresponding personal dose meters for measurement of the accumulated dose.

When taking X-rays near the reproductive organs, pay attention to using the best possible protection (testicle shielding cup or lead apron).

The operator shall always stand behind a shielding panel or partition when taking exposures.

Persons who must be near the patient during fluoroscopy shall wear protective clothing (a lead apron, for instance). The same applies for maintenance and repair work.

### 3.1.6 Interferences to other devices

There are no interferences to other devices known.  
The system meets the requirements of EN 60601.

### 3.1.7 Warnings

	Pinch points are present. Grip only the handle to pull out or to push in the cassette tray. Failure to comply may cause injury to operator's hands.
	Observe all general precautions to protect the patient against hazard from unwanted or excessive radiation.

### 3.2 Inserting a film cassette into the cassette tray

- A film cassette may be placed into the cassette tray, when the X-ray tube assembly is positioned.
- Pull out the cassette tray (Figure 2-1, item 1) by its handle (Figure 2-1, item 3) from the Bucky until it hits the forward stop.
- The cassette clamps (Figure 2-1, item 2) center the film cassette transversely within the cassette tray. Rotate its latch counterclockwise to unlock it.
- Open the cassette clamps (Figure 2-1, item 2) far enough to insert a film cassette of the desired size.
- Insert the film cassette with its transverse center line aligned with the notch in the cassette clamps (Figure 2-1, item 2) or push the film cassette against the cassette positioner (Figure 2-1, item 4) positioned into the locking corresponding to the inserted film cassette (13 cm, 18 cm, 24 cm, 30 cm, 35 cm, 40 cm, or 43 cm).
- Push the cassette clamps (Figure 2-1, item 2) against the film cassette, and rotate the latch into the locked position, so that the cassette sensing unit (Figure 2-2, item 3) will be activated and generates the cassette safety release signal (fail-safe).
- Push the cassette tray (Figure 2-1, item 1) fully into the Bucky, so that the cassette safety release signal (fail-safe) is transferred via the contact block to the Bucky electronic.

## 4 Operator Maintenance

### 4.1 Introduction

This chapter provides a maintenance schedule to ensure proper and safe operation after installation.

Further adjustments or calibrations not contained in this “Instructions for Use”, refer to the applicable “Technical Description” and have to be made by **PROTEC** personnel or expressly by **PROTEC** authorized service personnel.

**Before operating this x-ray unit, user have to make themselves acquaint with all controll elements and their functions.**

**The preventative maintenance procedures required to ensure the operational integrity and safety of the equipment are listed in the following paragraphs. It is the owner/user's responsibility to perform preventative maintenance at the specified intervals or arrange for such service with an authorized service representative.**

**Maintenance has to be recorded.**

### 4.2 Operating

1. Prior to service or maintenance ensure that the system is turned off and completely seperated from voltage (FI-switch or room emergency OFF switch)
2. Covers and boardings may only be opened by service personnel, as there may be high voltage behind them.

### 4.3 Safety Information

The user and the personal have to follow the warnings and safety information, placed on the device, disregarding may lead to injury.

Personal must make itself familiar with all warnings, placed on the device.

**They are necessary for the safety and ensure the correct operation.**

In the event of a malfunction, turn the equipment of and notify **PROTEC** service or the expressly authorised service provider.

### 4.4 Technical Safety Information

To protect the safety of patients, users and third parties, it is absolutely necessary that Checks, which ensure the reliable function and operational safety are made in intervals of 12 months by **PROTEC** service or expressly authorised service providers.

All parts of this equipment that could create a hazard through wear and tear must be checked in at least intervals of 12 months and if necessary, replaced by **PROTEC** service or by expressly authorized service providers at regular intervals.

As the manufacturer, we are responsible for the technical safety aspects of the equipment if any maintenance, repairs and/or modifications are performed by our staff or by expressly authorized service providers. Likewise, if component parts that affect the safety of the equipment are replaced by original replacement parts in the

event of a failure, we are responsible for the technical safety aspects of the equipment.

In the event that scheduled maintenance is not performed, **PROTEC** will not be responsible for damages incurred by the user or third parties if such damages are the result of improper or omitted maintenance.

Before the start of examination operations, the operator must ensure that all the equipment, which is listed in the Instructions for Use and which is relevant to safety, is functioning properly and that the product is ready for use. A visual check shall be made to insure that all displays and indicator lamps are functioning correctly.

#### **4.5 Preventative maintenance**

The preventative maintenance procedures required to ensure the operational integrity and safety of the equipment are listed in the following paragraphs. It is the owner/user's responsibility to perform preventative maintenance at the specified intervals or arrange for such service with an authorized service representative.

#### **4.6 User's maintenance**

##### **4.6.1 Daily maintenance prior to operation**

Check "User's maintenance schedule" for equipment compliance.

##### **4.6.2 Daily maintenance during operation**

No checking of the equipment is required during operation.

##### **4.6.3 Monthly maintenance**

Check "User's maintenance schedule" for equipment compliance.

##### **4.6.4 Service maintenance**

Required maintenance must be performed at twelve month intervals by **PROTEC GmbH & Co. KG** service or a specifically authorized service provider to ensure the safe and reliable operation of the equipment.

In the event that scheduled maintenance is not performed, **PROTEC GmbH & Co. KG** will not be responsible for damages incurred by the user or third parties if such damages are the result of improper or omitted maintenance.

#### **4.7 User's maintenance schedule**

##### **4.7.1 Daily maintenance**

1. Clean the Cassette Tray using a clean cloth and common household cleaner.
2. Check the controls for proper function.

##### **4.7.2 Cleaning**

**Prior to cleaning or disinfecting, ensure that the system power is turned off (remove power cord), that the emergency OFF switch or safety switch is actuated, and that no liquids can penetrate into the equipment.**

**Do not use water for cleaning.**

Water causes short circuits in the electrical portion of the system, and corrosion in the mechanical components.

**Do not use corrosives, solvents or abrasive cleaning materials.**

Clean painted and plastic surfaces only with a cloth and common household cleaners and wipe surfaces with a clean, dry, lint-free cloth.

Clean chrome-plated parts by wiping with a clean, dry, lint-free cloth.

#### 4.7.3 Disinfection

Prior to disinfecting, ensure that the system is turned off, that the emergency OFF switch or safety switch is actuated, and that no liquids can penetrate into the equipment.

All components, including accessories and connecting cables, may be disinfected only by wiping with a disinfectant solution. Please contact **PROTEC** if detailed information is needed concerning appropriate disinfection materials.

The equipment must be well covered with plastic sheets during room disinfection.

**For safety reasons, no spray disinfectant may be used.**

Recommendations and instructions regarding the use of disinfectants and methods of disinfection may be derived from the most recent rules and guidelines concerning disinfection and explosion safety.

#### 4.7.4 Quality Control

X-ray equipment should be quality-controlled at regular intervals, at least monthly, or as required by applicable regulations to determine that the image quality remains in accordance to national regulations, e.g. by a monthly consistency testing.

#### 4.7.5 Service Maintenance Schedule

To be performed by properly trained and equipped service personnel.

**12 Months intervals:**

1. Check all mechanical stops for damage and firm seating.
2. Check the performance of all mechanical parts.
3. Tighten loose screws and nuts.
4. Check guide rails for damage and traces of wear.
5. Check function of cassette sensing unit (fail-safe)

#### 4.7.6 Disposal Remarks

The **Manual Cassette Tray KL** does not contain any toxicological materials. All mechanical and plastic components have to be disposed according to local or national regulations.

In case of doubt contact **PROTEC GmbH & Co. KG**

## 5 Combination with other equipment

The Cassette Tray KL-FSE with cassette sensing unit (fail-safe) can be combined with the following equipment:

- **PROTEC GmbH & Co. KG** type Bucky for manual film cassette loading
- 3-field measuring chamber for Bucky
- Grid for Bucky

Combination with alternative equipment on inquiry only. For combination with other equipments please contact **PROTEC GmbH & Co. KG** for compatibility tests and release.

## 6 Technical Data

### 6.1 Measurements

Length: 586 mm  
Width: 471 mm  
Weight: 4,30 kg

### 6.2 Mechanical Characteristics

The Cassette Tray KL-FSE is made for continuous operation.

### 6.3 Electrical Characteristics

The Manual Cassette Tray KL-FSE requires no voltage supply.

### 6.4 Environmental Conditions

#### 6.4.1 Operating Environment

Temperature range + 10°C bis + 40°C  
Relative humidity range 30% bis 75% (not condensing)  
Atmospheric pressure range 700 hPa bis 1060hPa

#### 6.4.2 Transport and stock environment

Temperature range -15°C bis +70°C (5°F to 158°F)  
Relative humidity range 10% bis 95% (non condensing)  
Atmospheric pressure range 500 hPa bis 1060hPa

### 6.5 Standards

**The CE-labeling of this product is in conformity to the requirements of the European Community Medical Device Directive 93/42/ECC according to Article 11 Appendix II**

## 7 Description of Symbols, Labels and Abbreviations

### 7.1 Symbols



CE-marking



Attention, consult accompanying documents



Classification according to EN 60601-1, Class 1 Equipment, Type B




Attention, Pinch points are present



Observe all general precautions to protect the patient against hazard from unwanted or excessive radiation.

### 7.2 Labels

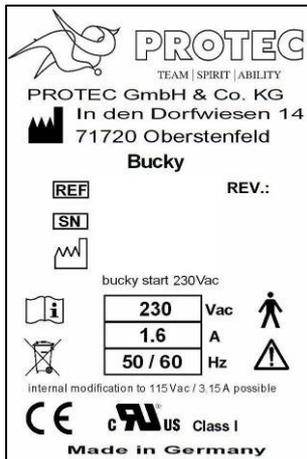

Bucky start may contain the following voltage specifications

230 Vac

115 Vac

24 Vdc

Voltage specifications may contain the following voltage specifications



230 Vac

115 Vac

24 Vdc

Nameplate

3-Field measuring chamber

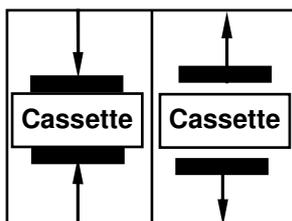

Cassette clamp

### 7.3 Abbreviations

mm	millimetre
cm	centimetre
"	inch
kg	kilogram
%	Percent
hPa	Hektopascal
°C	Degree centigrade
°F	Degree Fahrenheit
CE	CE-marking